


## York Shower Arm

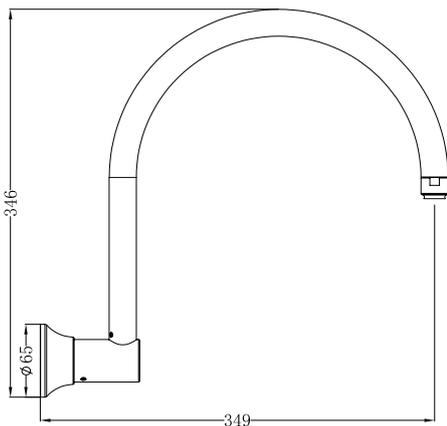

Dimensions are nominal measurements only.

## SPECIFICATION

PRODUCT CODE	YSW508
WATERMARK LICENSE	WM-060073
TEMPERATURE RATING	MIN 1°C-MAX 75°C
PRESSURE RATING	MIN 150KPa-MAX 500KPa

## FINISH

	CHROME NR508CH		MATTE BLACK NR508MB
	AGED BRASS NR508AB		

## MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water.

Do not use cream cleaners or citrus based cleaning products, as they are abrasive.

Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.


## PACKING INCLUDES

- 1x shower arm
- 1x installation kits




## Installation Instruction

G<sup>1/2</sup> outlet




1. Apply thread sealant or teflon tape on outlet thread.

adaptor




wall/  
ceramic tile



2. Screw adaptor on to outlet.  
Make sure the face of inlet is flush  
with wall/ceramic tile face.

3. Pull back plate on together with  
shower arm.

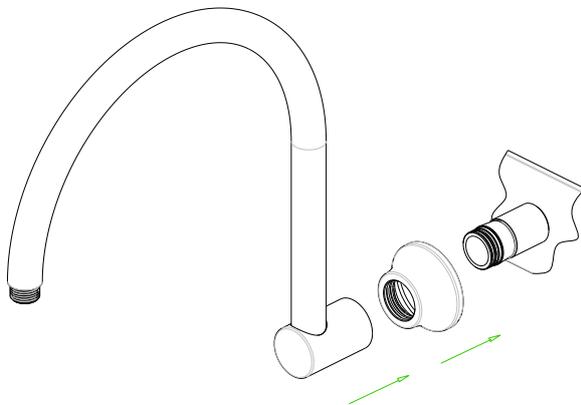

4. Pull shower arm onto adaptor.  
Screw grub screw into spout by wrench and cover  
by silicone cap.

