

## York Wall Top Assemblies








Versions:202401

#### Drawing





#### Specifications

Watermark License WM-060073 Temperature Rating Min 1°C-Max 75°C Pressure Rating

Min 150kpa - Max 500kpa

### Finish & SKU



A N

MATTE BLACK WITH METAL LEVER

Packaging Includes


2x Wall Top Handles


AGED BRASS WITH WHITE PORCELAIN LEVER NR692109b01AB

AGED BRASS WITH METAL LEVER NR692109b02AB


<sup>\*</sup>Dimensions are nominal measurements only.

Nero ———— 2 York Wall Top Assemblies – Manual

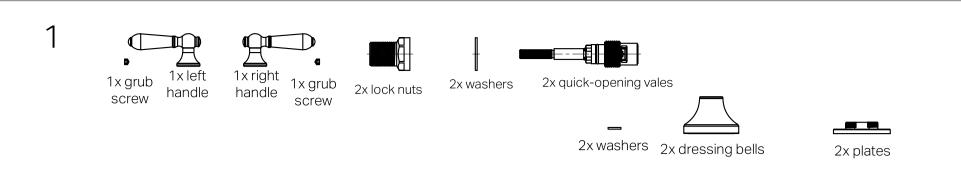


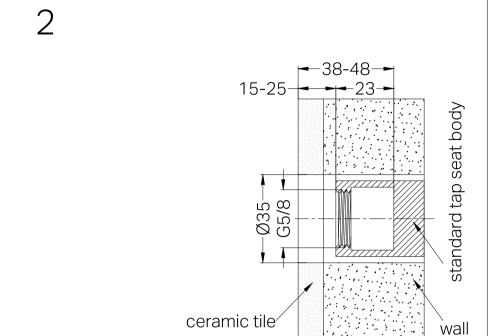


- Install the breech (not included) in advance.

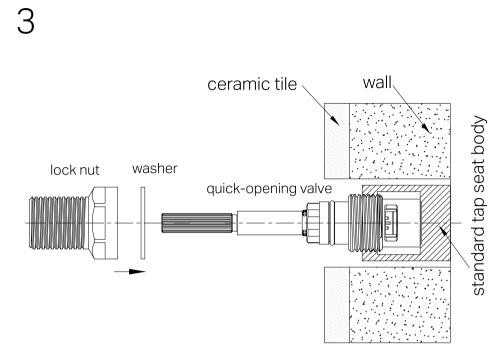


- Position the quick-opening valve to the breech body, and screw it in place tightly.
- Slide the washer onto the valve's end, secure with the locking nut. Ensure all parts are snug.
- Test for leaks.

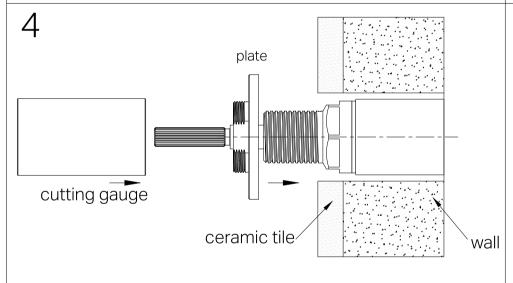

- Screw the plate and cutting gauge onto the lock nut tightly, ensuring a secure fit.

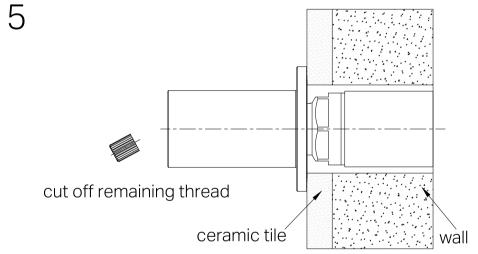

- Trim the excess thread flush with the cutting gauge.
- Smooth the trimmed edge.
- Test for leaks.

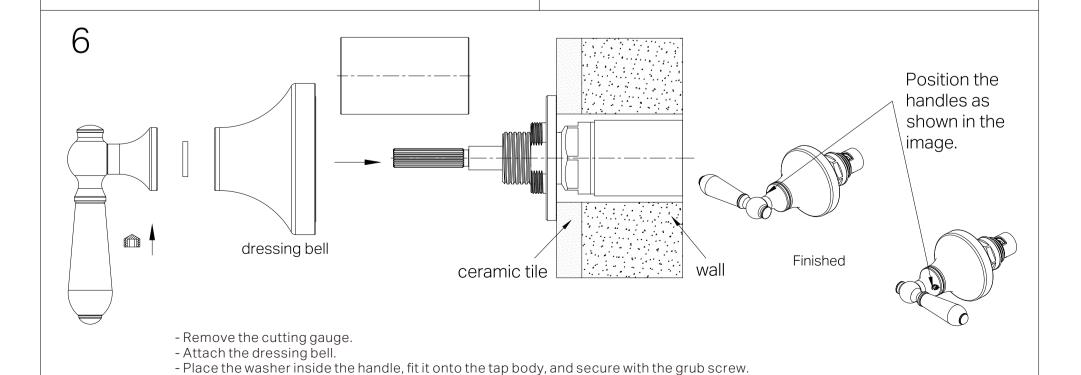

# Nero