

Revision: 2

Date: July 2018

Supersedes all previous issues

Opal II Easy Height

Vitreous China 4.5/3 litre Dual Flush Wall Faced Box Rim Close-Coupled Toilet Suite









Vitreous China 4.5/3 litre Dual Flush **Wall Faced Box Rim Close-Coupled Toilet Suite**

Opal II **Easy Height**





A modern close coupled 4.5/3 litre dual flush toilet suite with clean simple lines the fully integrated wall faced toilet suite featuring a raised height seat, smooth rounded surfaces and concealed plumbing fittings provides for optimum appearance and ease of cleaning. Ideal for aged care applications where a raised height seat offers the advantage of easier use for persons with restricted movement. A matching soft close seat is provided as standard. The pan connection system includes the patented Caroma Uni-Orbital® connector for increased installation flexibility. The Caroma Uni-Orbital® connector extends to any position in a 25mm radius, unlike traditional connectors that only move backwards and forwards. The setout range is from 60mm – 220mm with a recommended setout of 140mm, providing installation versatility for both new and renovation applications. The cistern is back inlet only with 1/2" B.S.P. inlet stop valve and inlet connection concealed within the cistern. Fitted with low profile chrome plated push buttons and the Unifill inlet valve for ultra quiet fast fill as standard.

Opal II Easy Height 4.5 litre full flush washdown pan with box flushing rim. Traps: Universal trap for S or P-trap installations. 50mm vent option available.

Cisterns: Opal II cistern - has a free fitting lid and is suitable for domestic and light commercial

applications. Available as internal overflow. Standard back entry. Vandal Resistant Conversion Kit - A simple to install conversion is available for the

standard mechanism to lock lid onto the cistern, recommended for use in heavy use commercial areas. Code No.750109.

Cistern inlet stop valve and inlet connection is concealed within the cistern and is included.

Important: Working pressure minimum 30kPa to maximum 1000kPa flow pressure. Rain water tank compliant. Accurate wall setout for B.S.P. 1/2" Nipple water inlet connection is essential.

Fixing: The cistern is fixed directly to the pan with a robust concealed base fixing system

without the need for wall fixing.

Seats: The Opal II soft close toilet seat is provided as standard with the Opal II Easy Height

suite. A quality solid section compression moulded toilet seat fitted with buffers and


Colours: White only.

Installation: The installation of the toilet suite shall be in accordance with the normal minimum

drainline grade requirements in AS/NZS 3500.2.

Dimensions: All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its


products. The right is therefore reserved to vary specifications without notice.

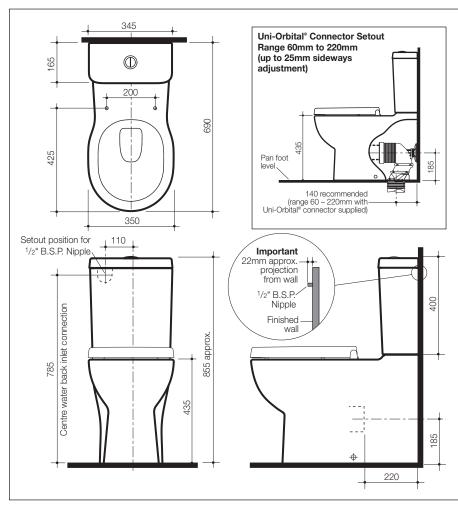









Note: All height dimensions to underside of pan, make allowance for bedding.

Bedding: The pan should be fixed to the floor with a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast drying cement in the bedding mixture. When bedded the back of the foot of the pan should be approximately 10mm above the finished floor.

Bracket fixing: The pan should be bedded with an acetic cured silicone sealant and fixed with the D82 Fixing Brackets supplied.