



Revision: 3
Date: July 2019

Supersedes all previous issues

Newbury

Acrylic Bath

Nominal Sizes: 1525mm x 760mm x 468mm
1670mm x 760mm x 478mm
1800mm x 850mm x 468mm



Acrylic Bath

Nominal Sizes:

1525mm x 760mm x 468mm

1670mm x 760mm x 478mm

1800mm x 850mm x 468mm



Take pampering to a new level with the luxury of a Newbury bath. Make the experience even more enjoyable with an optional headrest or backrest. The Newbury bath range has been designed to delight all senses with clean, simple lines and contemporary design. A variety of sizes makes Newbury a very accommodating choice. Complete with a four tile flange for built-in installation. Bath also available as spa baths in Immerse, Revive, Energize and Body Therapy configurations.

1525mm long x 760mm wide x 468mm deep - Standard Code No.NU5

1670mm long x 760mm wide x 478mm deep - Standard Code No.NU7

1800mm long x 850mm wide x 468mm deep - Standard Code No.NU8

Durability: Sanitaryware grade acrylic resists chipping, will not rust and has excellent heat retention properties. Its high gloss finish has natural slip resistance. Minor scratch marks can be removed with gentle metal polishes, such as Brasso.


Waste Outlet: The reinforced waste outlet is suitable for 40mm diameter standard waste assembly.

Bath Capacity: Newbury 1525 - 245 litres; Newbury 1670 - 280 litres; Newbury 1800 - 380 litres.


Installation: The bath is suitable for both built-in and island installations. The bath is supported around its rim and the base is supported with timber base supports. Refer to Sheet 9.01.1 for further installation information.

Colours: White only.


Dimensions: All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

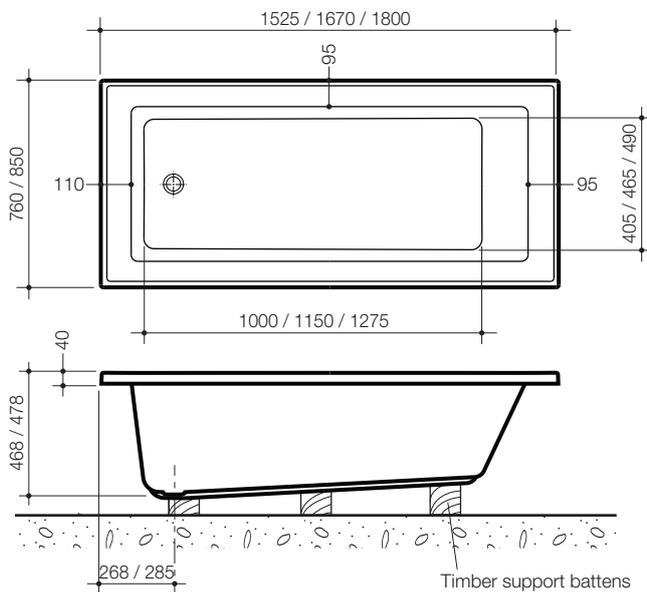


On the indicator lines, position and fix timber supports to base of the bath and floor with an approved floor and wall panelling adhesive or equivalent adhesive to provide a neat fit support. Ensure the rim of the bath is levelled during this procedure.

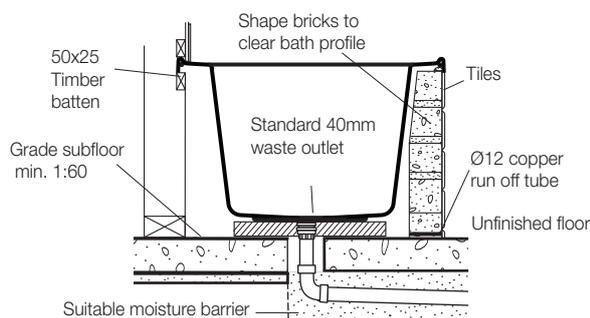

BUILT-IN INSTALLATION



ISLAND INSTALLATION

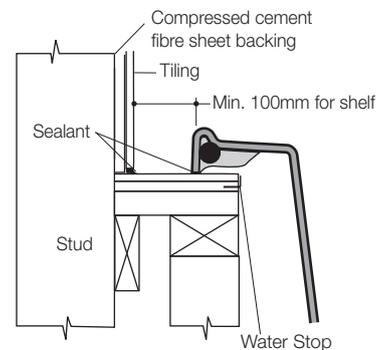

*** IMPORTANT:**
Refer to Local Authority for minimum setout from wall

TIMBER SUPPORT ALTERNATIVE

Bond inner face of bath to timber frame as detailed with approved floor and wall panelling adhesive

