

# 85cm Undermount Rangehood

## RANGEHOOD

PRODUCT CODE: **ERH85UMS**



### FEATURES:

- + 430 grade Stainless steel finish
- + 3 speed motor
- + 1000m<sup>3</sup> / hr extraction capacity
- + 2 x 1.5W LED lights
- + 2 x baffle filters
- + Undermount non-visible rangehood
- + Under push button control
- + Dishwasher safe cassette filter
- + Decibel rating 61-65-68 dBA
- + 150mm Flue diameter

### 3 SPEED MOTOR

This range hood provides the option of 3 different speed levels ensuring you have the option to use your range hood at a low, medium or high level of operation.

### EXTRACTION CAPACITY

The extraction capacity of 1000m<sup>3</sup> / hr provides strength and power to this stylish range hood.

### DISHWASHER SAFE CASSETTE FILTERS

The cassette filter has 5 aluminum layers, it can be placed in a dishwasher for easy cleaning and can easily be removed and re-connected from the range hood.

### FILTER CLEANING INFORMATION

Cassette filter requires cleaning monthly. This will ensure no interruptions with airflow operation.

### SPECIFICATIONS:

|                                   |   |
|-----------------------------------|---|
| <b>Electrical Requirements</b>    | Rangehood is supplied with 10amp cord & plug. |
| <b>Decibel Rating</b>             | 61-65-68 dBA                                  |
| <b>Carbon Filter (Optional)</b>   | CF160 (Requires 2)                            |
| <b>Available Ventilation Kits</b> |   |
| RHKE65EU                          | Wall - Eave vent kit                          |
| RHKMR65EU                         | Universal metal roof kit (includes flashing)  |
| RHKTR65EU                         | Universal tile roof kit (includes flashing)   |
| <b>Product Dimensions</b>         | W850mm x D290mm                               |




eurocooking



Warranty

### INSTALLATION DIAGRAM

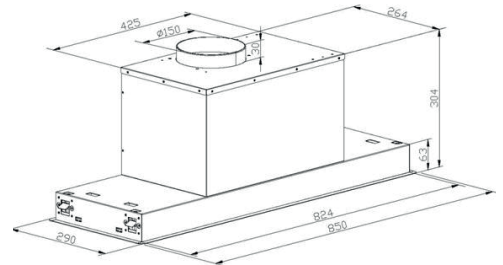

### HELPFUL TIPS

- + Leave your range hood on for 15 minutes after the cooking of the food to remove all odors, steam etc.
- + The dishwasher-safe cassette filters need to be cleaned after approximately 2 months of standard operation
- + It is recommended the range hood be installed between 650mm and 750mm above the cook top
- + It is also recommended that fumes from the range hood be ducted out into the atmosphere.
- + Turn off the range hood before attempting to clean

### INSTALLATION

Installation is recommended by a qualified installer, please refer to the product manual for full installation instructions.