

Oslo

OS513 (Pan: OS513 / Seat: VI1273ST / Flush Plate - Refer code below when ordering)
OS513RDPPCR, OS513SQPPCR, OS513RDPPBK, OS513SQPPBK

Wall Hung and Inwall Toilet Suite

All dimensions in mm



OS513RDPPCR



OS513SQPPCR





OS513RDPPBK



OS513SQPPBK



*Specify flush plate code when ordering.

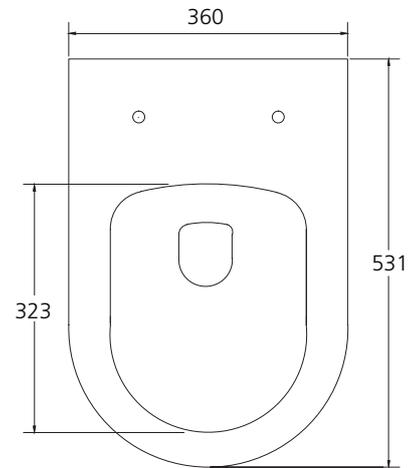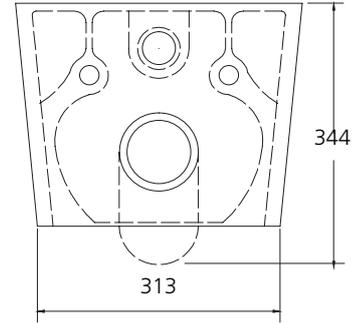

Specifications /

WELs Rating	4 star, 3.5L avg flush volume
Pan	Rimless/Easy-clean design
Traps	P-trap installation
Set outs	P-trap set out refer drawing
Cistern	Geberit Sigma8 Concealed Cistern with Frame (Dual flush valve 4.5L/3L)
Fixing	The toilet is fixed with a Geberit concealed water tank in wall.
Seat	Soft close and quick release toilet seat is provided as standard. Compression moulded toilet seat, fitted with buffers and metal hinges.
Colour	White (with chrome or black flush plate)
Installation	The installation of the toilet suite shall be in accordance with the normal minimum drain line grade requirements in AS/NZS 3500.2.
Materials	Vitreous china
Weight	Pan is 26.8 kg
Parts list	UF toilet seat, Geberit double flushing valve, standard pipe.
Warranty	10 years vitreous china cistern and pan replacement of product; 2 years valves, fittings and seat; 1 year seals and labour (refer to oliveri.com.au)
Maintenance and care instructions	All surfaces should be cleaned with mild liquid detergent or soap and water. Do not use cream cleaners or citrus based cleaning products, as they are abrasive. Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.



Oslo

SET OUT DRAWING

All dimensions in mm

OS513 (Pan: OS513 / Seat: VI1273ST / Flush Plate - Refer code below when ordering)
OS513RDPPCR, OS513SQPPCR, OS513RDPPBK, OS513SQPPBK
 Wall Hung and Inwall Toilet Suite

