Caroma

Sovereign Trident

Vitreous China 4.5/3 litre Dual Flush Cistern, Matched Pan, Plastic Seat and Connector Plate CI/SfB |(74.1) | g3 | Date May 2015

Supersedes all previous issues

3.29.1







Caroma

Sovereign Trident

Vitreous China 4.5/3 litre Dual Flush Cistern, Matched Pan, Plastic Seat and Connector Plate





The **Sovereign Trident** connector matched suite combines the Trident 4.5 litre pan and the Sovereign cistern in an integrated system comprising of cistern with high performance outlet valve, seat and plastic connector plate, which conceals the flush pipe and water connection.

Pans: Trident 4.5 litre full flush washdown pan with open flushing rim.

Traps: S or P-trap unvented only.

Inlet: 50mm back inlet 40mm key seal is available if required.

Cisterns: Sovereign cistern (wall fix version) – has a free fitting lid and is suitable for

domestic and light commercial applications. **Vandal Resistant Conversion Kit** – A simple to install conversion is available

for the standard mechanism to lock lid onto the cistern, recommended for use in

heavy use commercial areas. Code No.750109.

Inlet Valve
Standard Bottom Entry Cistern – available as right hand inlet which is
Overflow: interchangeable and incorporates Quietflow 2 inlet valve. Internal overflow

interchangeable and incorporates Quietflow 2 inlet valve. Internal overflow only. Important: Working pressure minimum 30kPa to maximum 1000kPa flow

pressure. Rain water tank compliant.

Seat and Connector Plate: Available in three toilet seat coupling kit options - Trident standard, Uniseat,

Caravelle standard or Caravelle soft close toilet seat.

Colours: White (W) and Ivory (I)


Installation: The installation of the toilet suite shall be in accordance with the normal minimum


drainline grade requirements in AS/NZS 3500.2.

Dimensions: All dimensions are in millimetres and are subject to normal manufacturing

variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications

without notice.

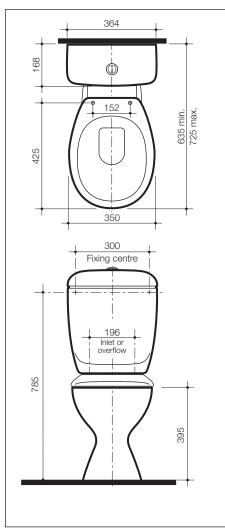



Trident Sovereign Connector Suites with Seat:		
Internal Overflow	Code No.	Colour:
S trap with Trident Standard Seat	981556W	W
P trap with Trident Standard Seat	981576W	W
S trap with Trident Standard Seat	981556I	ı
P trap with Trident Standard Seat	981576l	ı
S trap with Caravelle Standard Seat	980156W	W
P trap with Caravelle Standard Seat	980176W	W
S trap with Uniseat Seat	981356W	W
P trap with Uniseat Seat	981376W	W
S trap with Caravelle Soft Close Seat	980156SC	W
P trap with Caravelle Soft Close Seat	980176SC	W

Note: All height dimensions to underside of pan, make allowance for bedding.

Bedding: The pan should be fixed to the floor with a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast drying cement in the bedding mixture. When bedded the back of the foot of the pan should be approximately 10mm above the finished floor.

Screw fixing: The pan should be bedded with an acetic cured silicone sealant and fixed with corrosion resistant screws and pan guard washers. Use Caroma screw fixing kit.
Code No.601150.