caroma

CI/SfB |(74.4) | g3 | Date July 2008

Supersedes all previous issues

8.01.3

Caroma Care Semi Recessed Basins Selection

Geo
Caravelle 600
Caravelle 550
Liano
Cosmo
Laser
Concorde 500

Installation for People with Disabilities. Installations Complying to A.S.1428-1



Shown with chrome waste (supplied as standard late 2008).



Caroma Care Semi Recessed Vanity Basins

Caroma Care Semi Recessed Basin Installations Complying to A.S.1428-1



Caroma Care semi recessed basin installations for people with disabilities & complying to A.S.1428-1. The **Geo, Caravelle 600** and **550, Liano, Cosmo, Laser** and **Concorde 500** semi recessed basin options are suitable for use in installations for people with disabilities when used with suitably designed tapware.

Important: Further reference must be made to A.S.1428-1 with current amendments to

confirm installation requirements. The dimensions in this sheet may change with amendments to the standard.

Caroma Care Seven semi-red

Semi Recessed Li

Seven semi-recessed basins are suitable - Geo, Caravelle 600, Caravelle 550,

Liano, **Cosmo**, **Laser** and **Concorde 500**. See Section 2 for further details.

Basins: See Section 2 for further det

Position of The basin must be installed to

Position ofThe basin must be installed to provide a specified unobstructed space beneath it so **Wash Basin:**The basin must be installed to provide a specified unobstructed space beneath it so that water supply pipes and waste trap fittings do not encroach into the required clear

space.

Position of Tapware : For compliance to the Standard the basins must be installed with lever or electronic type tapware. The Caroma Care basin mixers with extended lever or the G Series hospital tap set with 150mm levers are ideal for this application and are recommended


(see Caroma Taps).


It is a requirement that the end point of the lever throughout its operational arc of

movement be not more than 300mm from the front of the basin.

Dimensions: All dimensions are in millimetres and are subject to normal manufacturing variations.

Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

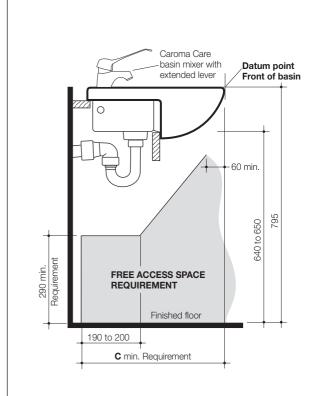



Basin	Α	В	С	D	E	F	Code No.
Geo	249	200	439	475	400	70	851515
Caravelle 600 *	262	305	452	480	610	60	659510
Caravelle 550	227	270	417	445	550	60	659710
Liano	254	300	444	470	420	60	661215
Cosmo	197	254	387	440	495	72	864015

Basin	Α	В	С	D	Ε	F	Code No.
Laser	254	300	444	470	570	65	656215
Concorde 500	214	245	404	430	500	60	654210

 $^{{\}bf Note:}$ For compliance with A.S.1428-1 G Series hospital taps are not suitable for these basins