

Opal Sole 550

- Suitable for Sole Occupancy Unit

Ceramic Wall Basin

Basin Size: 550mm x 560mm (nominal)





Tapware and shroud shown for photographic purposes only

The Opal Sole 550 Wall Basin is a contemporary style basin with smooth rounded contours and clean lines. Suitable for sole occupancy units, the Opal Sole Wall basin meets the needs of the designer market for prestige projects. With superior functionality this basin is designed with an increased projection to allow for easier access for wheelchair users. The waste is also positioned towards the back of the basin to minimize splashing. Available with optional shroud, this basin is suitable for domestic, commercial and accessible applications & complying to AS 1428.1-2009 Amd. 1 using standard Caroma plastic traps.*

Tap Holes: Basin available in: no tapholes Code No.631700, one taphole – centre option

Code No.631710 and three taphole option Code No.631730

Tapware - other than sole Nordic and Acqua. Electronic Tapware: Cobra, Designo, Designo Solar, Mix Occupancy unit: Neu and Celis. See section 19 for further details.

Tapware - sole Recommended tapware for sole occupancy unit for compliance to AS1428.1-2009 **occupancy unit:** Amd. 1; **Basin Care Mixers**: Medica Prado, Pin, Nordic and Agcua. **Electronic**

Tapware: Cobra, Designo, Designo Solar, Mix Neu and Celis. See section 19 for further details

further details

Waste Outlet: Chrome grate waste and white plug supplied, suitable for a 40mm trap

connection. Alternative waste options are available — Flush fitting Chrome Waste Code No. 687327C, Vandal Resistant Flush Fitting Chrome Waste Code No.687141, Covered Chrome Plug and Waste Code No.687142 and Vandal

Resistant Covered Chrome Plug and Waste Code No.687143

Shroud: Optional Opal Sole Shroud, Code No.631701 completely conceals P-trap waste

pipe fittings, concealed fixing bracket supplied. 40mm Caroma short plastic

P-trap is required for correct installation Code No.102115.


Note: It is essential for the installation of the shroud to the basin that clearance is provided for the shroud in the plumbing setout from water inlet pipes and

connections

Bowl Capacity: 9 litres.

Overflow: Overflow not available.

Colours: White only.

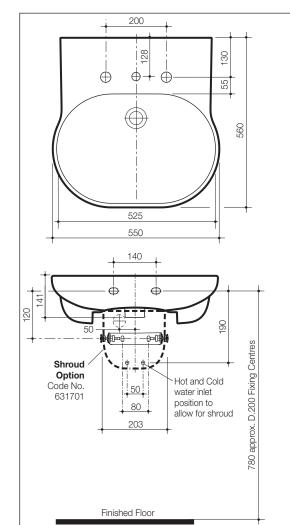

* Reference must be made to the AS 1428.1-2009 Amd. 1 to confirm installation requirements.

All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

