


For Cleanflush™ Pans Used with In-Ceiling Installations

IMPORTANT: Restrictors must be used with Cleanflush™ pans in all in-ceiling installations.

When installing the Cleanflush™ pans with the Invisi II cistern in-ceiling, two restrictors for a standard flush pipe, or one restrictor for a 40mm DWV fabricated flush pipe, must be installed in the position/s shown below.

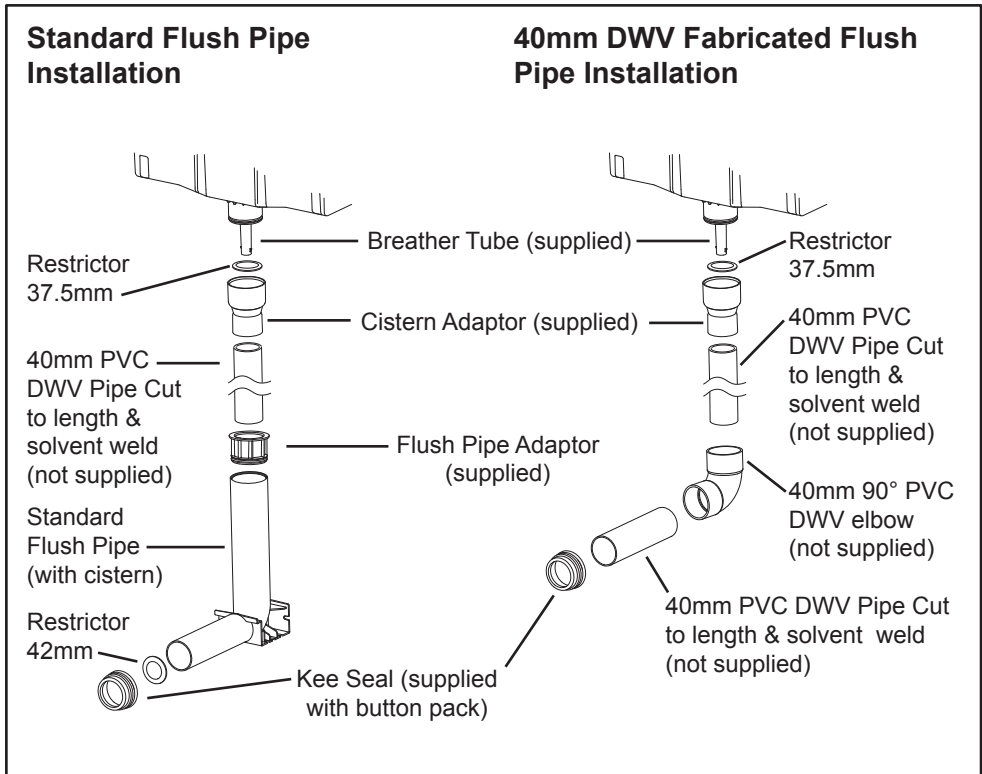

Note: For standard flushpipe installations the first-fix plumber must tape the 42mm restrictor and this instruction leaflet to the horizontal leg of the flushpipe for use during the pan installation.