




Commercial Stainless Steel Hinge

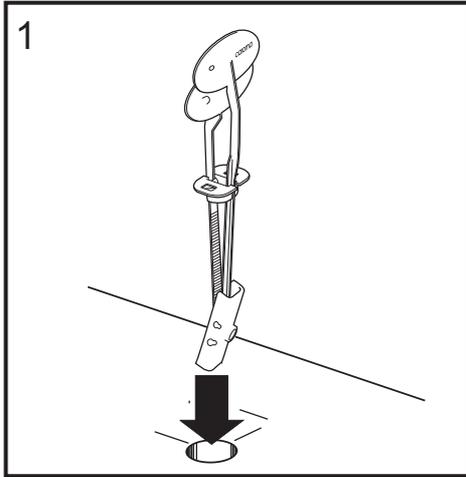


1 Push metal toggle through pan hole.

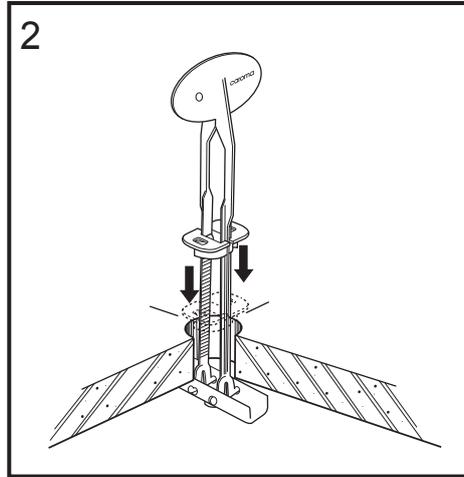


2 Realign handles and pull upwards while pushing locking bush down into pan hole.

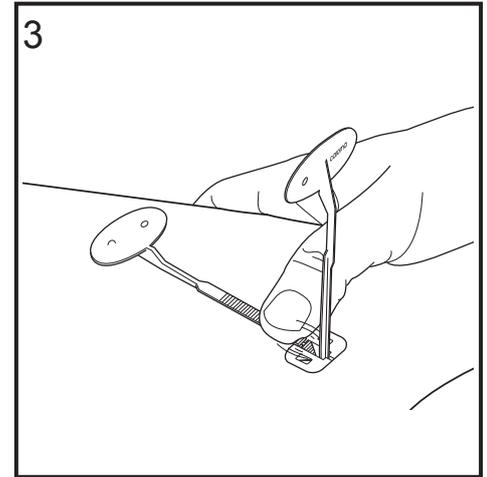


3 Break off handles flush with locking bush. Trim excess with a pair of side cutters if required.

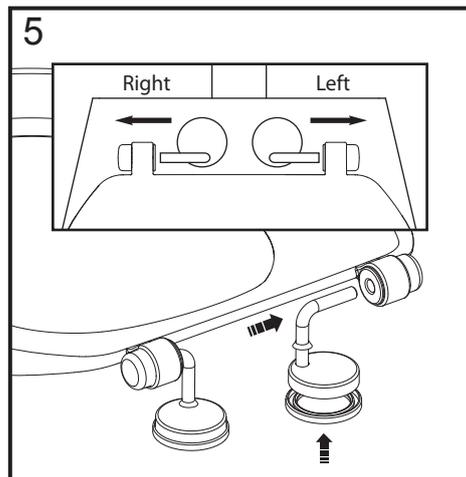


5 Insert the left hand and right hinges. Push on rubber pad to base of stainless steel hinge and rubber seal over hinge post.

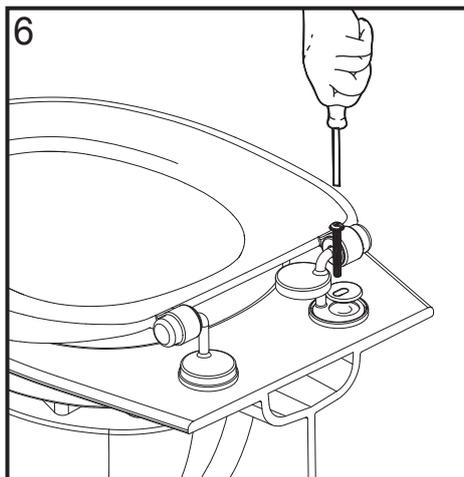

6 Remove the steel cover, insert the plastic washer and loosely bolt the hinges to the pan.

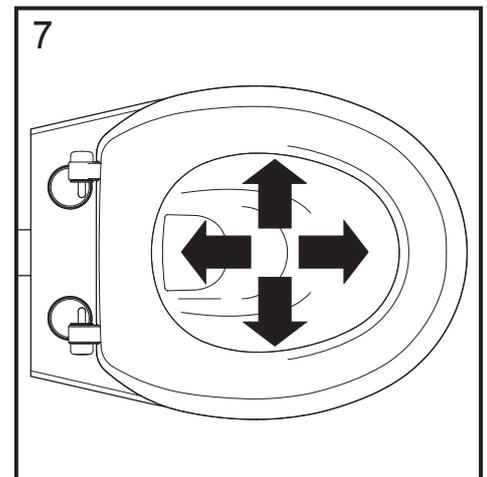

7 Position the Seat on the Pan then fully tighten the bolts, replace the steel cover and ensure seals are firmly in place at base of hinge posts

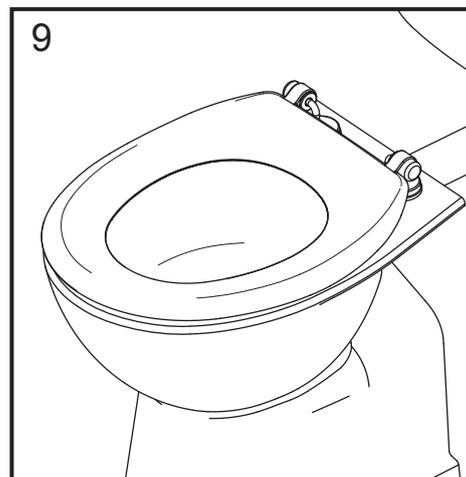

9 Single Flap seat shown

IMPORTANT : Never use abrasive or harsh chemical cleaners. Wipe seat with warm soapy water to maintain surface finish.