

# Project Premium Bath

J5115A - 1500mm Bath


J5116A - 1675mm Bath



marbletrend


## PROJECT PREMIUM and SELECT MKII ACRYLIC BATH

### INSTALLATION INSTRUCTIONS

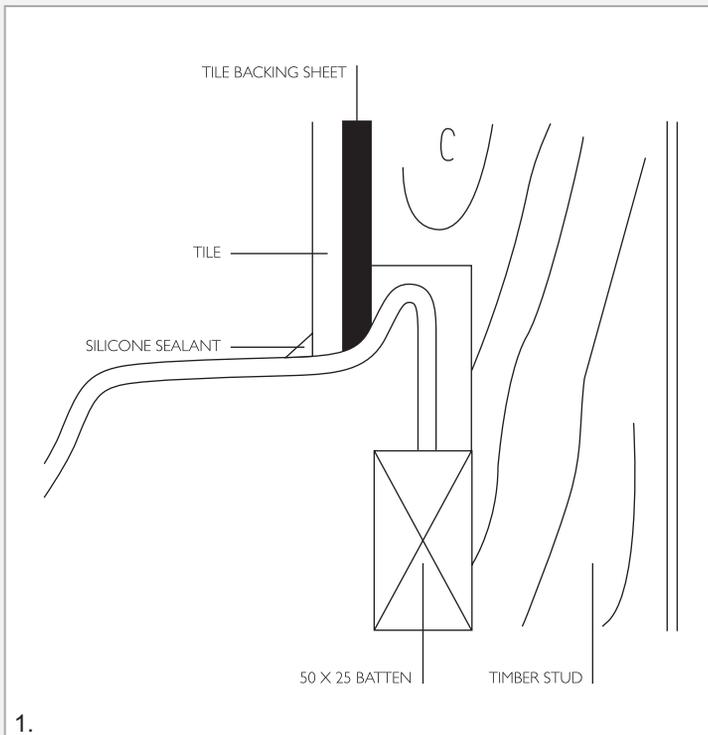

Check that your floor is level and secure. Your Marbletrend bath does not need to be supported by a mortar bed. To adhere your bath to the floor, simply run a generous bead of silicone along the timber support and allow sufficient time to cure. Timber supports must have full contact with floor to achieve correct support for bath.

1. Place bath into position and ensure that the bath is level. The rim around the bath and the base must be fully supported. If the bath is being checked into an adjoining wall, make sure the wall is rebated to a depth that will allow the tiling bead to be checked in.

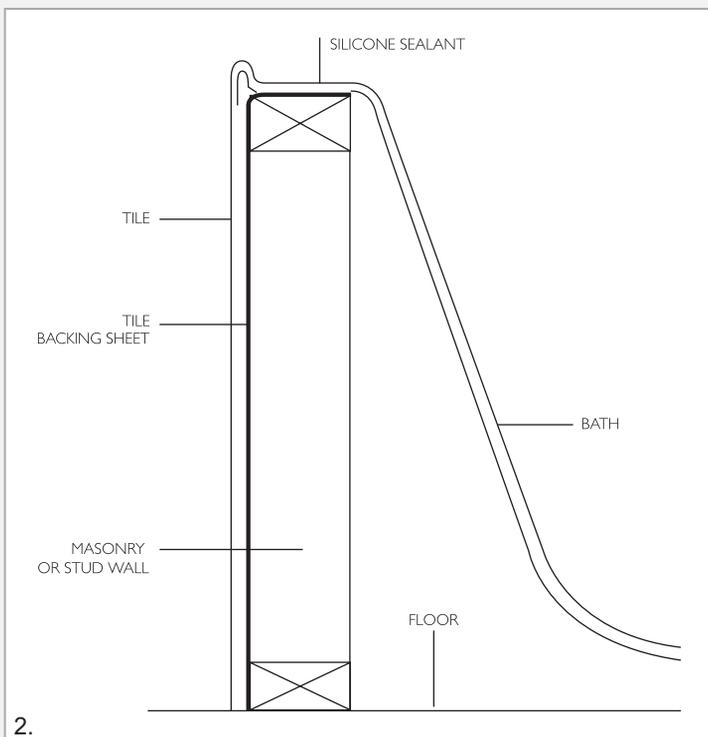

2. The front edge and sides of the bath are to be supported by a mini wall that can be constructed out of timber or masonry.

**Specifications are subject to change without prior notice. We recommend that temperature of hot water used with this product does not exceed 55°C.**

Failure to follow this installation guide will void the warranty.

Carefully inspect your bath prior to installation as no claims will be accepted if the product has been installed

Dimensions are in millimetres and are subject to normal manufacturing variation of +/- 3mm on all surfaces. As product development is ongoing BPA reserves the right to vary specifications without notice.  
Bathroom Products Australia P/L ABN 87 079 297 617

2/97 BANKSIA ST  
BOTANY, NSW 2019  
TEL: 1300 717 717 FAX: 1300 746 480  
www.marbletrend.com.au