

## Waipori 3 Hole Hob Mounted Set

Basin: 01-8284

Bath: 01-8307

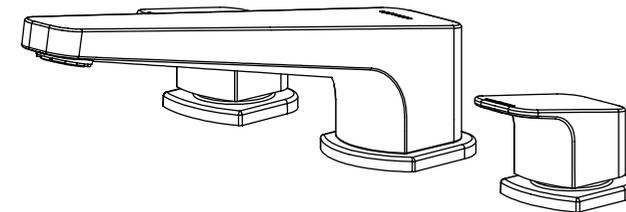


Illustration Only

## Installation Guide

### IMPORTANT

**Please read all of the instructions before installation**

Use of this product is recommended for domestic and commercial applications. Domestic and commercial warranty terms and conditions vary. Please refer to the Methven website for full warranty terms and conditions - [www.methven.com](http://www.methven.com)


All pipework must be thoroughly flushed prior to the installation of the mixer. Inline filter washers must be installed on both hot and cold supplies to prevent foreign particles damaging the ceramic head works.

Do not remove the ceramic head works from the mixer when installing. Damage caused by hydrostatic testing is not covered by Methven's warranty.

**Methven recommends a licensed plumber carry out all installations in compliance with the requirements of AS/NZS 3500. This product complies with AS/NZS 3718 regulations.**



Applies to basin mixer only

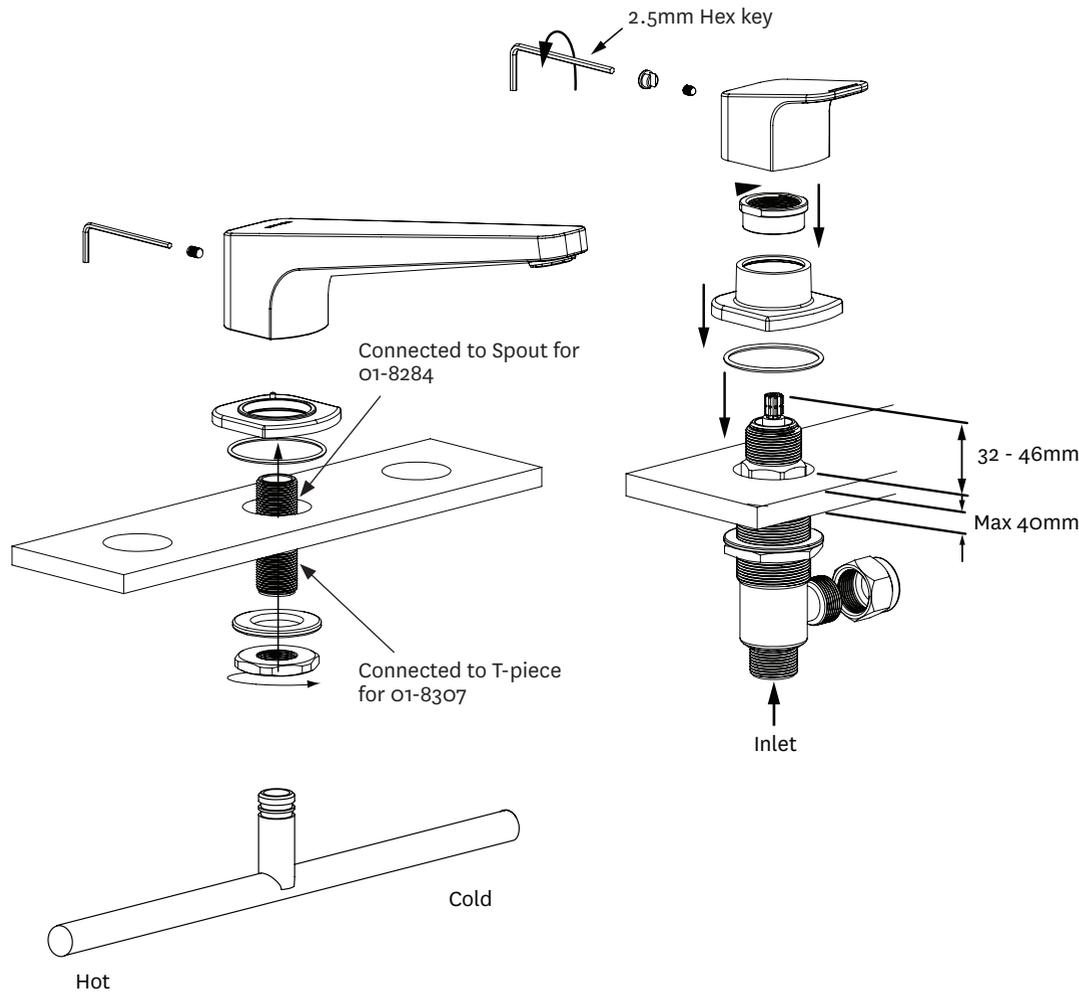

April 2012

MA018284

**Methven Australia Pty Ltd**

ABN 15 104 813 390  
Melbourne, Australia  
[www.methven.com](http://www.methven.com)

[www.methven.com](http://www.methven.com)

Customer Care Hotline: 1300 METHVEN (638 483)  
Email: [info@au.methven.com](mailto:info@au.methven.com)

## Technical Specification

**Inlet Connections:** All 1/2" BSP

**Operating Pressure:** 150kPa - 500kPa

For optimum performance hot and cold water pressures should be equal.

AS/NZS 3500 stipulates a 500kPa maximum operating pressure at any outlet within a building. Where normal pressure exceeds 500kPa, a pressure limiting valve must be installed.

This basin mixer set is rated at 7.5l/m. If limited water flow is experienced, locate stream shaper flow restricting device and filter washers and clean away foreign material as required.

**Operating Temperature:** Recommended hot water supply 50°C, maximum 70°C. AS/NZS 3500 requires all hot water supplies to any sanitary fitting to be tempered to 50°C.


**Ceramic cartridges:** Warranty claims will be void where the ceramic head works has malfunctioned due to the presence of the following within the water supply:

- Copper tube pieces
- Plastic pieces
- Sand, dirt or stones
- Thread tape
- Other objects not normally present in the potable water supplies

## Product Components

Please check every component in accordance with the table below

No.	Item description	Qty supplied
1	Spout	1
2	Push fit inlet connector (bath only)	1
3	Base ring (spout)	1
4	O-ring	3
5	1/2" BSP	1
6	Mounting gasket	1
7	Mounting plate	1
8	Handle with grub screw & cap	2
9	Lock nut	2
10	Half dome/handle plate	2
11	Body assembly	1
12	2.5mm hex key	1
13	T-piece	1

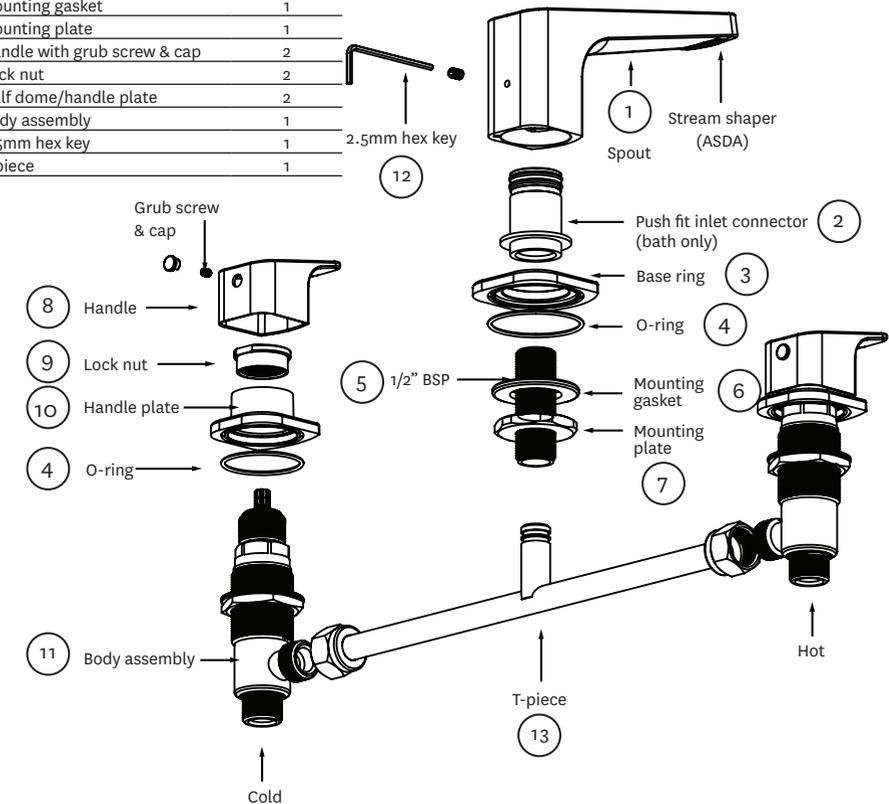

## Handle Parts / Assembly

Standard Spindle & Handle Assembly Set Up



Hot 04-9752  
Cold 04-9769

SPARE PARTS (NOT INCLUDED)

Spindle Handle Extension 04-9837



Spindle Flange M x F Extension 04-9875



## Care and Cleaning

Never use abrasives to clean this product. Clean regularly with contamination free warm soapy water and a damp soft cloth. Damage caused by using unsuitable cleaning agents is not covered by warranty.

[www.methven.com](http://www.methven.com)

Customer Care Hotline: 1300 METHVEN (638 483)

Email: [info@au.methven.com](mailto:info@au.methven.com)

## THE METHVEN GUARANTEE

The warranty statement shall apply to all tapware & showers supplied by Methven For more information visit [www.methven.com](http://www.methven.com)

THIS WARRANTY ISSUED BY: Methven Australia Pty Ltd, Melbourne Australia