



Ceramic Cartridge Adjustment

Do not remove the ceramic cartridge from the body assembly while carrying out the following adjustments. Note, the cartridge is factory set for maximum temperature

Remove half-dome
(if attached)




Flow limiting adjustment




1.5mm Allen Key

Mix temperature limiting adjustment



Minimalist Wall Mounted Bath Set

01-2732

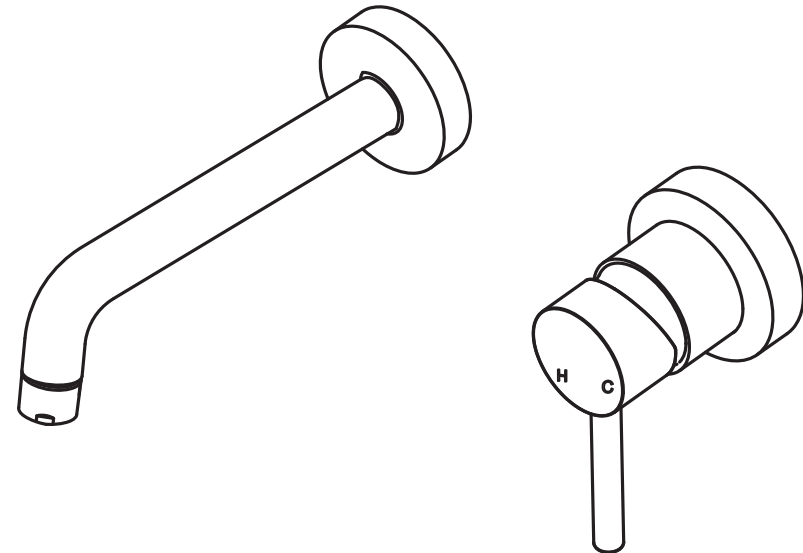

Installation Guide

IMPORTANT

Please read all of the instructions before installation

Use of this product in non-domestic applications voids warranty.
All pipe work must be thoroughly flushed prior to the installation of the mixer.
NEFA inline filters must be installed on both hot and cold supplies.
Do not remove the ceramic cartridge from the mixer when installing.
Damage caused by hydrostatic testing is not covered by our warranty.



Technical Specifications

Inlet Connections: All 1/2" BSP
 Operating Pressure: 150kPa - 500kPa
 Operating Temperatures: Recommended hot water supply 50°C, maximum 70°C. AS 3500 requires all hot water supplies to any sanitary fitting to be tempered to 50°C.

Avoid restrictive piping, fitting or sharp angled bends when plumbing the mixer. The maximum working pressure of the ceramic cartridge is 1000kPa.

“In situ” testing

The maximum working pressure of the ceramic cartridge is 1000kPa. Do not hydrostatic test the installation with this mixer installed. Damage to the ceramic cartridge may occur, voiding our warranty.

Spout Installation

1. If required trim brass nipple to a length that allows outlet to pass through plate when against wall
2. Fit faceplate to wall
3. Fit outlet to nipple

Mixer Installation

Refer to diagram below and on the following page.

1. Remove the black plastic mixer protector but do not discard.
2. Secure the mixer body to the wall framing at the required position. Outlet port upwards.
3. Connect the hot and cold supplies to the mixer inlets marked H and C respectively. Connect outlet.
4. Check the connections for leaks.
5. A single $\varnothing 50\text{mm}$ hole will be required during wall lining installation.
6. Remove and discard the black plastic mixer protector and screws only when the wall lining and faceplate are to be fitted.
7. Slide faceplate over mixer until the faceplate is flush with the wall. Ensure the drain notch in the face plate is at the bottom, care should be taken not to block the drain notch.
8. Fit the handle to the lever of the cartridge. Secure the handle in place by using the grub screw provided.

Diagram A

