Floor to Ceiling Towel Rail Installation Manual



Please read through these instructions before installation

Radiant heated towel rails are manufactured to the following standard:

AS/NZ 3350.1.2002

SAA Approved - Certificate V 07911 Touch temerature less than 60 deg C

• IP Rating - IP55

Rated voltage 240v

The towel rail is designed for drying towels and is intended for use in residential and hotel bathrooms. The towel rail must be installed in accordance with local wiring regulations.

Care of your towel rail

Radiant heated towel rails are manufactured from stainless steel and it is recommended that you clean them regularly with a soft damp cloth. If you need to use a cleaning product you should only use a product suitable for cleaning a polished stainless steel surface.

Note:


This appliance is not intended for use by young children or infirm persons without supervision. The cord extension must be positioned so that it is not subject to splashing or ingress of moisture.

Installation

The floor to ceiling towel rail is fixed to both the floor and ceiling with stainless steel mounting feet.

If the floor to ceiling towel rail is too short, we recommend that you pack the base mounting feet with suitable 30mm diameter washers. The overall height of the towel rail can be increased to a maximum of 25mm.

If the floor to ceiling towel rail is too long, you can cut 2 x 32mm diameter holes in the ceiling and slide the uprights into the ceiling void. Before doing this you will first need to slide the top mounting feet over the uprights.

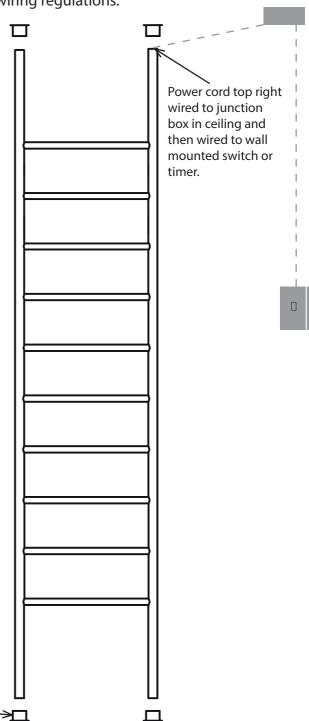

Fixing feet -