



# RAYMOR

## Classic II Rimless


VITREOUS CHINA

Couple Toilet Suite

Installation set out for Classic II Rimless Close couple Toilet Suite

Product Code: Original Suite 133575 / STD Seat Suite 194379

### SET OUT DRAWING

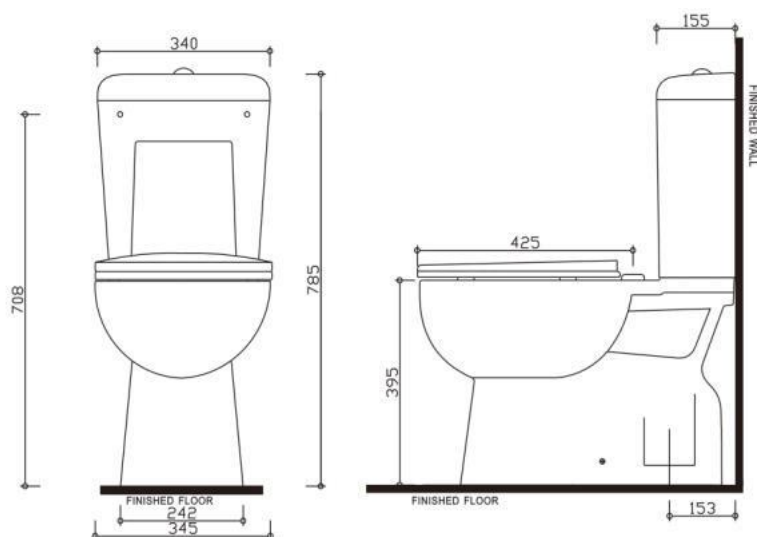

Remove all products from packaging:

Check the product for damage, if the product is damaged return to the store of purchase, check the product is complete with all components required to install.

This product is to be installed by a licensed plumber, failing to do so will void warranty. This product is to be installed as per Australian Standards and local authority requirements.

**Warning:** Do not bed the pan in place using cement, concrete OR SIMILAR MATERIAL, DOING SO WILL VOID THE PRODUCT WARRANTY.

## Toilet Suite Installation

### Toilet Pan Installation

N.B The Classic II Close Coupled Toilet Suite has a fixed set out of 153mm from finished wall to centre of outlet, if your set out is outside the 153mm do not attempt installation. A 25mm offset Pan collar may be used however confirm fitment of the pan collar as this pan has a shrouded outlet and some offset pan collar brands vary in size and may not fit. Tradelink will only cover warranty on a toilet suite using a 25mm offset pan collar as greater offset pan collars can cause toilet blockages.

1. Mark the centre line of the pan connector on the floor for 'S' trap installation.

2. Place the pan into position centralising the pan on your centre line, draw around the pan base and mark the entry points on the floor to where the floor fixing holes are on the side of the pan.
3. Remove the pan and drill and screw into place the floor fixing brackets, set the floor fixing brackets 15mm inside the line drawn around the base. Use suitable floor fixing screws & toggles to suit the floor material.
4. Critical, the pan must be on a level surface, if the floor slopes away the pan will need to be levelled using suitable floor chocks around the pan to support and stabilise the pan.

#### **Toilet cistern installation**

1. Marking Cistern wall fixing holes- place cistern onto Pan without sponge gasket, square up cistern to pan and mark wall through cistern fixing holes, remove cistern and drill wall and fit suitable wall plugs based on wall material.
2. Locate the cistern on to the pan with the sponge gasket placed on the cistern outlet valve tail and connect the tank to pan using attachment bolts. Ensure that the cistern and pan are in contact when tightened. DO NOT OVER TIGHTEN.
3. Screw cistern to wall using suitable screws and preassembled wall plugs.
4. Connect one end of the supplied Female to female Flex connector to the inlet valve (DO NOT OVER TIGHTEN), connect the other end to mains Water. (DO NOT OVER TIGHTEN).
5. Place cistern lid on top of the cistern and check push button workability.
6. Assemble the seat using the seat assembly instructions supplied in the seat box.

**Important:** Sand and debris move through water pipes. Always flush the line prior to connecting Toilet Suite inlet pipe to water control valve.

#### **Warranty Contact Details:**

Tradelink Pty Ltd  
ABN: 29000003832  
1051 Nudgee Rd  
Banyo QLD 4014  
Ph: 1300 658 277

[Warranty@Tradelink.com.au](mailto:Warranty@Tradelink.com.au)

#### **Warranty:**

For continued piece of mind, this product comes with limited warranty from date of purchase. For full warranty terms and conditions of the warranty including how to claim and your rights as a consumer, please consult [www.raymor.com.au](http://www.raymor.com.au). *"If you are a consumer as defined under the Australian Consumer Law, our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure."*

**Issue Date: 10 Oct 2020**

**Revision Number: 1.0**

**Revision Date: N/A**