

SHOWER RAIL



SPECIFICATION


PRODUCT CODE YSW315 **WELS RATING** 4 STAR 7.5L/MIN WATERMARK LICENSE WM-060093 TEMPERATURE RATING MIN 1℃-MAX 75℃ PRESSURE RATING MIN 150KPa-MAX 500KPa

FINISH



NR315CH

chrome

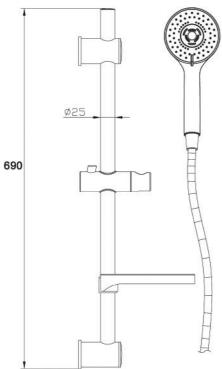

MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water.

Do not use cream cleaners or citrus based cleaning products, as they are abrasive.

Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty

PACKAGING INCLUDES

- 1x shower rail
- 1x handle shower
- 1x shower hose
- 1x elbow
- 1x installation kit


Dimensions are nominal measurements only.










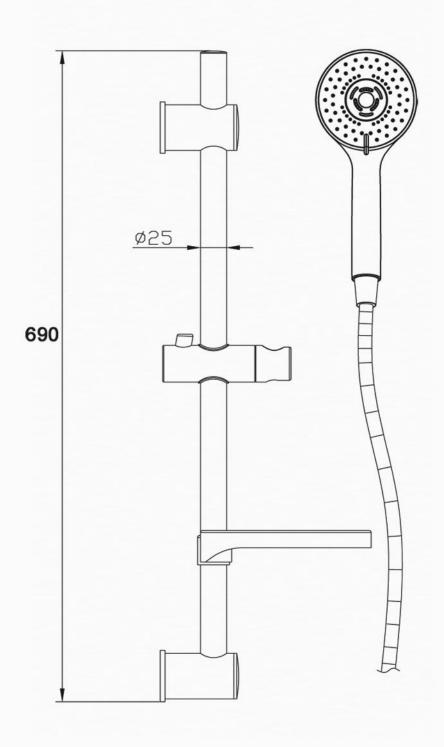

SHOWER RAIL YSW315



NOTE

- 1.Seal all wall penetrations with a neutral cure silicone.
- 2. The inlet of the shower hose is connect to a wall elbow installed by the plumber at a suitable height.
- 3. This is only an installation guide . Nero Tapware recommends having the product onsite before commencing rough in.
- 4. This product may not be suitable for use with gravity-fed water heaters, low pressure supply networks, instantaneous water heaters, tempering valves and thermostatic mixing valves