

# Oslo

**OS127BTW** (Pan: OS127BTW / Seat: V11273ST / Flush Plate - Refer code below when ordering)

**OS127RDPPCR, OS127SQPPCR, OS127RDPPBK, OS127SQPPBK**

Wall Faced Toilet Suite

All dimensions in mm



OS127RDPPCR



OS127SQPPCR





OS127RDPPBK



OS127SQPPBK



\*Specify flush plate code when ordering.

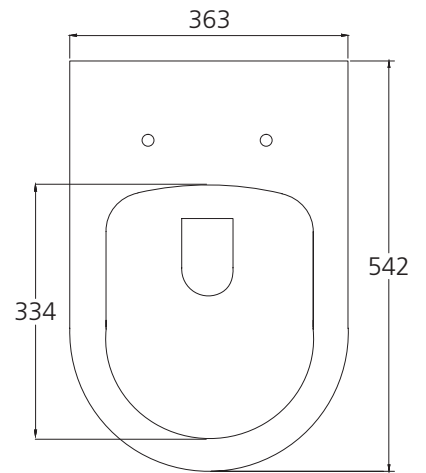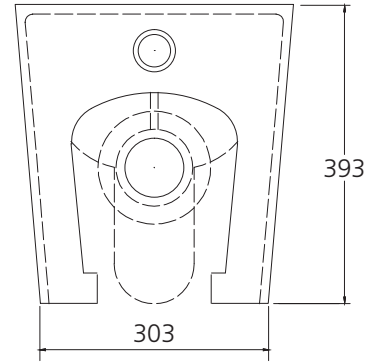

## Specifications /

<b>WELs Rating</b>	4 star, 3.5L avg flush volume (4.5/3L)
<b>Pan</b>	Rimless/Easy-clean design
<b>Traps</b>	Universal (S or P-trap)
<b>Set outs</b>	S-trap set out 50mm - 110mm as standard. P-trap set out 185mm floor to centre of outlet. Optional S-trap set out 150mm - 180mm (SPB0201).
<b>Cistern</b>	Geberit Sigma8 Concealed Cistern (Dual flush valve 4.5L/3L)
<b>Fixing</b>	The toilet is fixed with a Geberit concealed water tank in wall
<b>Seat</b>	Soft close and quick release toilet seat is provided as standard. Compression moulded toilet seat, fitted with buffers and metal hinges.
<b>Colour</b>	White (with chrome or matt black flush plate)
<b>Installation</b>	The installation of the toilet suite shall be in accordance with the normal minimum drain line grade requirements in AS/NZS 3500.2.
<b>Materials</b>	Vitreous china
<b>Weight</b>	Pan is 32.9kg
<b>Parts list</b>	UF toilet seat, Geberit double flushing valve, standard pipe
<b>Warranty</b>	10 years vitreous china cistern and pan replacement of product; 2 years valves, fittings and seat; 1 year seals and labour (refer to oliveri.com.au)
<b>Maintenance and care instructions</b>	All surfaces should be cleaned with mild liquid detergent or soap and water. Do not use cream cleaners or citrus based cleaning products, as they are abrasive. Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.



