## caroma®

CI/SfB | (74.1) | g3 |
Date | July 2008

Supersedes all previous issues

4.07.1

## **Concorde Concealed**

Vitreous China 4.5 litre Pan







## Concorde Concealed

## Vitreous China 4.5 litre Pan

For Ultra Low or Low Level Wall Mounting





A new generation in water-saving technology sanitaryware product, the **Concorde Concealed** pan matched with several Smartflush cisterns which use Caroma Smartflush technology to deliver a 4.5/3 litre dual flush vitreous china toilet suite system. Combined with the Concorde Concealed 4.5 litre SmartFlush pan, the Sovereign 2000 cistern is an integrated system comprising of cistern with Quietflow 2 inlet valve suitable for mid to low level wall mounted installations. For an update on Smartflush refer to http://www.caroma.smartflush.info

Pan: Concorde Concealed – 4.5 litre full flush wash down pan.

Traps: S-trap (concealed) and P-trap (exposed). Slope of P-trap 95°.

**Inlet:** 50mm back inlet.

Cisterns: Vitreous China Cisterns

Standard Sovereign 2000 Cistern – has a free fitting lid and is suitable for

domestic and light commercial applications.

**Plastic Concealed Cisterns** 

Several Caroma concealed cistern options are available – **Compact Under** 

Counter dual flush cistern, Invisi inwall/induct cisterns.

**Plastic Exposed Cisterns** 

 $\label{thm:cosmo} \textbf{Trident Smartflush}, \textbf{Cosmo Smartflush}, \textbf{Slimline} \ \text{and Verona Aire} \ \text{cisterns}.$ 

**Fixing:** The cistern is secured directly to the finished wall with simple alignment

adjustment provided.

Seats: Suitable with Caroma seat options. Uniseat, Caravelle Vandal Resistant, Trident

and **Deluxe**.


Colours: White and Ivory.

Installation: The installation of the toilet suite shall be in accordance with the normal minimum

drainline grade requirements in AS/NZS 3500.2.

**Dimensions:** All dimensions are in millimetres and are subject to normal manufacturing variations.

Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

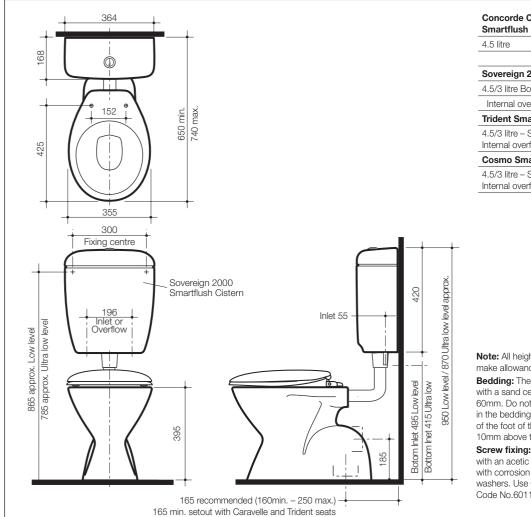

Concorde Concealed Smartflush Pans:		Code No.
4.5 litre	S trap	834300
	P trap	834350
Sovereign 2000 Smartflush Cisterns:		
4.5/3 litre Bottom entry	- Standard	
Internal overflow	RH inlet	727120
Trident Smartflush Cisterns:		
4.5/3 litre – Standard Internal overflow	RH inlet	215031
Cosmo Smartflush Cistern:		
4.5/3 litre – Standard Internal overflow	RH inlet	235007

**Note:** All height dimensions to underside of pan, make allowance for bedding.

**Bedding:** The pan should be fixed to the floor with a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast drying cement in the bedding mixture. When bedded the back of the foot of the pan should be approximately 10mm above the finished floor.

Screw fixing: The pan should be bedded with an acetic cured silicone sealant and fixed with corrosion resistant screws and pan guard washers. Use Caroma screw fixing kit. Code No.601150.