

WALL BASIN PLUMBERS INSTALLATION INSTRUCTIONS PLEASE READ CAREFULLY BEFORE INSTALLATION

Symphony Wall Basin Installation

Procedure D.200 Fixing Kit.

IMPORTANT

Provide suitable reinforcement behind finished wall for the basin D.200 Fixing at the fixing height position.

Roughing in for D.200 Fixing Kit:

For timber stud walls, noggins and studs must be positioned at a height to allow for the location of fasteners as detailed in **Figure 1**.

BASIN INSTALLATION WITH D.200 FIXING KIT


- **1-** Mark fixing screw hole position on finished wall at the recommended height as detailed in **Figure 1**.
- **2-** Drill two Ø12mm holes in masonry wall for expansion fasteners. For timber stud walls drill two Ø8mm holes for Fixing Screws.
- 3- Insert expansion fasteners into the drilled holes in masonary wall. Screw Fixing Screws into the wall using the flats located on the screws section of the stud and spanner as shown in Figure 2.


Allow 45mm of thread to protrude from the finished wall.


- 4- Fit taps and waste assembly to the basin.
- 5- Locate basin onto the Fixing Screws on the wall. Insert plastic bushes, metal washers and fasten to wall with fixing nut. To complete assembly as detailed in Figure 3.
- **6-** The Plastic Bush allows for leveling adjustment if required by rotating the hexagonal head bush, the basin will be slightly raised or lowered as shown in **Figure 3**.
- **7-** Tighten fixing nuts and connect plumbing to complete the installation.

Fixing Positions D.200 Fixing Kit

40mm Caroma
Plestic
Ode No.
102112
102112
Fixing Centre
Fixing Centre
Fixing Centre
Fixing Place Caroma
Fixing Centre
Fixing Centre
Fixing Place Caroma
Fixing Caro

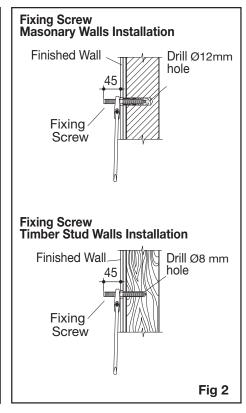





All measurements are subject to accepted manufacturing tolerances.

To ensure accuracy please check actual product dimensions before drilling for installation.

The manufacturer reserves the right to change specifications at any time without giving prior notification.

This product should be installed by a qualified plumber. Local authority, Water Board, and Building Regulations may apply to the installation of this product, and you should consult the appropriate bodies on these requirements. Failure to comply may invalidate the product warranty

Issue No: 1 Date of issue: 10.06.09