Nero

Mecca Wall Basin Mixer Swivel Spout 225mm

SPECIFICATION

WELS RATING

5 STAR 6L/MIN

WATERMARK LICENSE

WM-060073

TEMPERATURE RATING

MIN 1°C-MAX 75°C

PRESSURE RATING

MIN 150KPa-MAX 500KPa

FINISH



CHROME

MATTE BLACK

NR22190910rtMB



BRUSHED NICKEL NR22190910rtBN

NR22190910rtCH



GUN METAL

NR22190910rtGM



Ø 60

BRUSHED GOLD

NR22190910rtBG



BRUSHED BRONZE

NR22190910rtBZ




MATTE WHITE

NR22190910rtMW



120

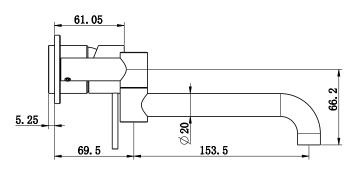

MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water.

Do not use cream cleaners or citrus based cleaning products, as they are abrasive.

Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty

PACKING INCLUDES

- 1x spout
- 2x plates
- 1x handle
- 1xcartridge bell
- 1xdressing ring

Dimensions are nominal measurements only.



 \emptyset 60







Versions: V1




Installation Instruction For Trim Kits

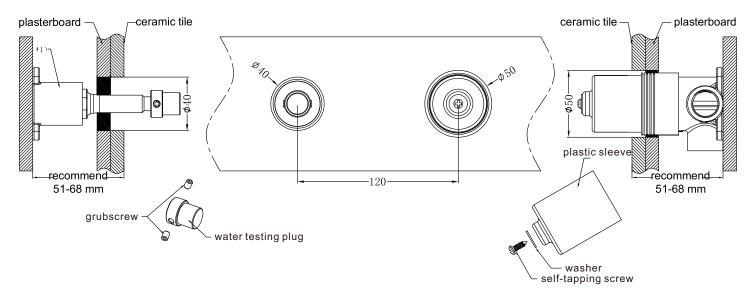

- 1.Drill a ϕ 50 and a ϕ 40 hole on ceramic tile, then install ceramic tile according to above picture.
- 2. Remove self-tapping screw, washer, plastic sleeve, grub screw and water testing plug.

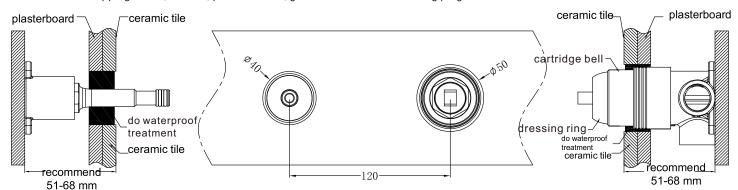

- 3. Put on cartridge bell.
- 4. Screw on dressing ring.
- 5.Do waterproof treatment for the gap between plastic sleeve and cartridge bell and gap between ceramic tile and spout.

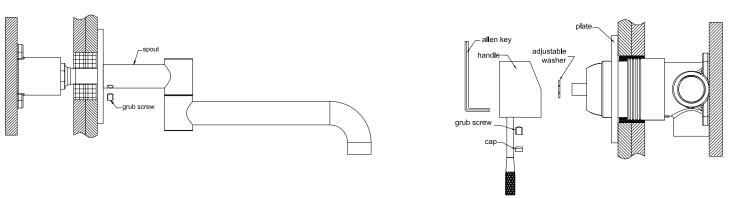

- 6.Put plate onto body.
- 7. Put adjustable washer onto cartridge stick, put on handle and tighten grub screw of handle firmly by allen key, put cap in grub screw hole.
- 8. Install spout onto body, tighten grub screw of spout firmly by allen key.