

Caroma®

CI/SfB	(74.8)	n6
Date	March 2017	

Supersedes all previous issues

Luna

Acrylic Bath

Nominal Sizes: 1525mm x 735mm x 438mm
1675mm x 735mm x 438mm

9.09.3



Caroma®

Luna

Acrylic Bath

Nominal Sizes:
1525mm x 735mm x 438mm
1675mm x 735mm x 438mm



Classic and relaxed. The subtle, subdued curves of Luna will effortlessly flow into any contemporary bathroom. Team up with the Luna collection for a stylish, timeless look. Complete with a four tile flange for built-in installation.

1525mm long x 735mm wide x 438mm deep – standard Code No.LU5W
1675mm long x 735mm wide x 438mm deep – standard Code No.LU7W

Durability: Sanitaryware grade acrylic resists chipping, will not rust and has excellent heat retention properties. Its high gloss finish has natural slip resistance. Minor scratch marks can be removed with gentle metal polishes, such as Brasso.


Waste Outlet: The reinforced waste outlet is suitable for 40mm diameter standard waste assembly.

Bath Capacity: Island 1525 - 245 litres; Island 1675 - 270 litres.


Installation: The bath is suitable for both built-in and island installations. The bath is supported around its rim and the base is supported with timber support batten supports. Refer to installation instructions for further information.

Colours: White only.


Dimensions: All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

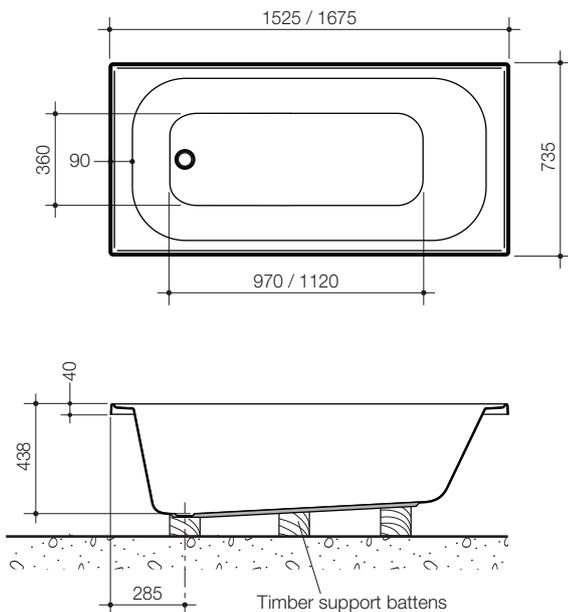


On the indicator lines, position and fix timber supports to base of the bath and floor with an approved floor and wall panelling adhesive or equivalent adhesive to provide a neat fit support. Ensure the rim of the bath is levelled during this procedure.

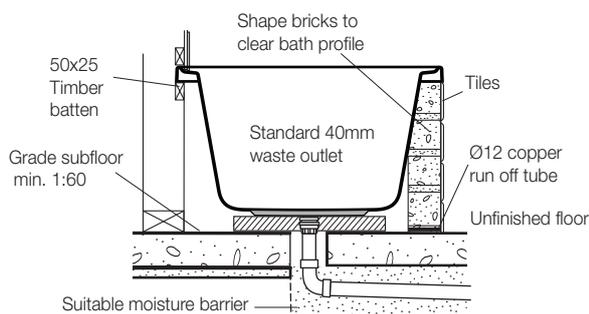

BUILT-IN INSTALLATION



ISLAND INSTALLATION



* IMPORTANT:

Refer to Local Authority for minimum setout from wall.

TIMBER SUPPORT ALTERNATIVE

Bond inner face of bath to timber frame as detailed with approved floor and wall panelling adhesive

