

Connector 4.5/3 litre Pan

'S' trap installation

Note: Offset connectors with an offset greater than 15mm are not suitable for this pan.

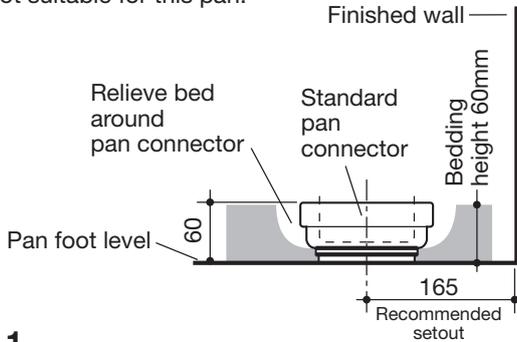


Fig. 1

'P' trap installation

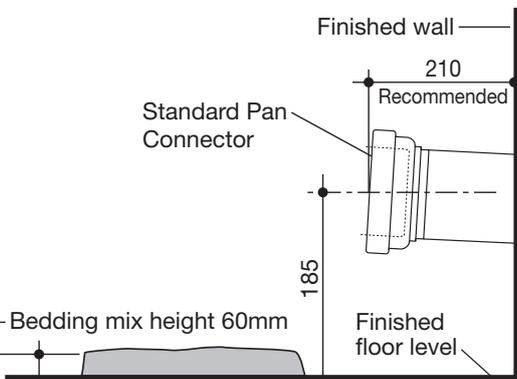


Fig. 2

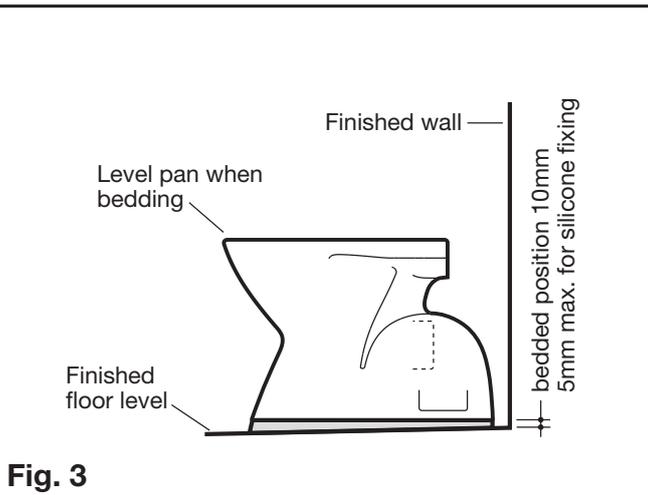


Fig. 3

IMPORTANT

TO ACHIEVE A SATISFACTORY 4.5/3L FLUSH PERFORMANCE AND A 4 STAR WATER EFFICIENCY RATING THE PAN MUST BE MATCHED WITH A COMPATIBLE STYLUS 4.5/3L CISTERN. THIS TOILET PAN IS ALSO SUITABLE FOR STYLUS 6/3L CISTERNS.

All measurements are subject to accepted manufacturing tolerances. To ensure accuracy please check actual product dimensions before drilling for installation. The manufacturer reserves the right to change specifications at any time without giving prior notification. This product should be installed by a qualified plumber. Local authority, Water Board, and Building Regulations may apply to the installation of this product, and you should consult the appropriate bodies on these requirements.

PLUMBERS' INSTALLATION INSTRUCTIONS

PLEASE READ CAREFULLY BEFORE INSTALLATION THESE INSTRUCTIONS SUPERSEDE INSTRUCTIONS IN THE PAN CARTON

PAN FIXING PROCEDURE

Roughing Procedure

The soil pipe and pan collar should be accurately fixed into position as recommended for Stylus pans, as detailed in **Figure 1** and **Figure 2**.

Pan Bedding

1. Remove an area of tiles which are within the internal area covered by the foot of the pan to expose the subfloor to provide a bondage key for the bedding mixture.
2. Ensure that bedding area is clean and free of building material.
3. Prepare bedding sand cement mixture 3:1 to depth of 60mm as detailed in **Figure 1** or **Figure 2**.

NOTE: Do not fill the foot of the pan with bedding mix or include lime or fast drying cement in the mix, these may cause cracking in the foot of the pan.

4. Position pan and connect with pan connector then level pan into bedding mixture, so that the back of the foot of the pan is approximately 10mm above the finished floor as detailed in **Figure 3**. It is recommended that wedges are used to support the foot of the pan during the positioning.

Screw Fixing

1. Position pan onto pan connector. Adjust pan position if necessary and mark location of pan fixing holes on the floor. Remove the pan.
2. Drill two holes in the marked positions on the floor. The hole diameter is dependent on the type of fixing system and floor finish.

IMPORTANT- DO NOT USE THE PAN SCREW HOLES AS A GUIDE FOR DRILLING AS THIS MAY CRACK THE PAN.

3. Ensure that the area around the floor is clean and free from building material.
4. Run a bead of acetic cured silicone sealant at a height of 8mm approximately fully around the foot of the pan which contacts the floor. Use Wedges around the foot base (if required) so that the maximum height of silicone sealant is not greater than 5mm on completion on bedding.
5. Connect pan to pan connector and fix to the floor with suitable corrosion resistant screws. Level the pan with the acetic cured silicone sealant to the finished floor. Remove any excess sealant.